

LARGE SCISSORS AERIAL WORK PLATFORMS



JLG[®]
reachingout

www.jlgeurope.com



Unleash machines that drive your performance higher.

On the job site, days are measured by productivity. Your productivity. Which means you need equipment that stands up to the day's demands. JLG has what you need so you can put in the most productive day possible. Scissor lifts that can handle more workers and supplies in one shot.

Whether you're treading on slab or off, JLG® Scissor Lifts provide superior performance and reliability. Our engine powered scissor lifts deliver exceptional terrainability and gradeability. JLG RT Scissor Lifts have the capacity to accommodate both workers and our exclusive Workstation in the Sky® accessories. And the hybrid LE Series allow you to work both indoor and out.

Give your day's productivity a major boost upward with JLG Large Scissor Lifts.



MODEL 260MRT
MINI ROUGH TERRAIN SCISSOR LIFTS

**Narrow design,
easy mobility.**

With standard four-wheel drive, rugged lug tread tyres and 35% gradeability, you'll be able to keep work moving, on or off slab. The 260MRT compact scissor lift delivers exceptional mobility thanks to a narrow 1.75 m chassis that gets you into those challenging spots.

A large work platform with a 1.22 m roll-out deck extension keeps everything you need within arm's reach. Simplified ground control wiring and built-in diagnostics are provided for serviceability.



MODEL 260 MRT ADVANTAGES

- Narrow 1.75 m chassis fits into tight spaces.
- Standard four-wheel drive with 35% gradeability.
- Larger deck space and 570 kg capacity.
- Stronger arm stack for improved scissor rigidity.
- Ease of service with built-in diagnostics.

**Higher capacities,
bigger platforms.**

The powerful RT Series lets you work more efficiently on the job, over a range of applications, with increased lift capacities and bigger platforms. When you want to finish on time and on budget, put the RT Series to work for you. The exclusive MegaDeck® platform gets more people and materials up to your work area for optimum productivity. This is critical when you have applications requiring multiple sheets of drywall or siding.

Set up quickly and efficiently with the optional one-touch leveling jacks. With an average leveling time of 15 to 30 seconds, you can cut set up time by 100% compared to other scissor lifts.



RT SERIES ADVANTAGES

- Maximum 1.020 kg capacity for more workers and materials.
- MegaDeck with optional dual extensions provides over 13.5 m of work space.
- Up to 45% gradeability.
- 12.6 m and 15.11 m working heights.
- Faster leveling capabilities with optional one-touch leveling jacks.
- Hydrostatic 4-wheel drive delivers unmatched terrainability.

RT SERIES
ROUGH TERRAIN SCISSOR LIFTS



Leveling Jacks
Meet uneven surfaces head-on with the push of a button. You get precise self-leveling when positioned on up to a five degree angle from side to side and up to a four degree angle from front to rear.





High and mighty: the Liftlux® Series.

The Liftlux® Series offers up to a maximum working height of 26.5 m and maximum platform work space. Get more workers and materials up and out for the most productive day possible.


Choose from three models that combine the advantages of high capacity, large platform work space and exceptional rigidity to provide outstanding performance.

LIFTLUX® ADVANTAGES

- Most units have a large single hydraulic extension deck to increase work space (up to 7.80 m extended deck length) providing more outreach.
- The NIVOLUX® outrigger device provides automatic self-levelling (+/- 0.10°) of the unit on slopes and uneven ground, reducing the time needed to position the machine.



AERIAL WORK PLATFORMS SPECIFICATIONS

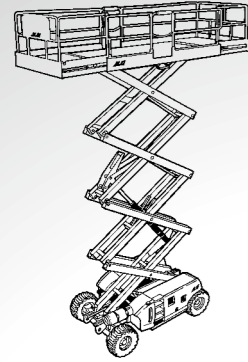

Main Features

- Oscillating Axle on 3394RT and 4394RT
- 4-Wheel Drive
- Automatic Transmission
- AC Powercable to Platform
- Self-Closing Entry Gate

260MRT


Rough Terrain Scissor Lifts

Platform Height	7.92 m
Platform Capacity	570 kg
Capacity on Extension	140 kg
Platform Size	1.65 x 2.59 m
Overall Width	1.75 m
Weight	3,390 kg
Diesel Engine – Kubota D1005	23.5 hp (17.5 kW)

Available Options

Flashing Amber Beacon	•
Leveling Jacks	•
Platform Worklights	•
13 mm Air Line to Platform	•
1.22 m Manual Front Deck extension	•

AERIAL WORK PLATFORMS SPECIFICATIONS

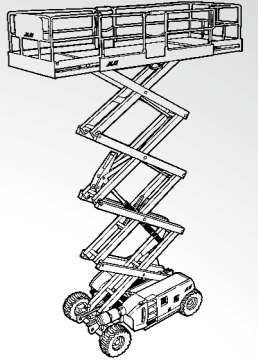

Main Features

- Oscillating front Axle on 3394RT and 4394RT
- 4-Wheel Drive
- Automatic Transmission
- AC Powercable to platform
- Self-Closing Entry Gate

3394RT

4394RT

Rough Terrain Scissor Lifts


Platform Height	10.06 m	13.11 m
Platform Capacity	1,020 kg	680 kg
Capacity on Extension	225 kg	225 kg
Capacity w/Dual Extensions	905 kg	565 kg
Platform Size	2.18 x 3.81 m	2.18 x 3.81 m
Overall Width	2.39 m	2.39 m
Weight	6,600 kg	7,100 kg
Diesel Engine – Deutz D2011L03	36.4 kW	36.4 kW

Available Options

Flashing Amber Beacon	•	•
Leveling Jacks	•	•
Platform Worklights	•	•
13 mm Air Line to Platform	•	•
1.22 m Powered Dual Deck extensions	•	•
1.22 m Manual Rear Deck extension	•	•

• Available - Not available

AERIAL WORK PLATFORMS SPECIFICATIONS

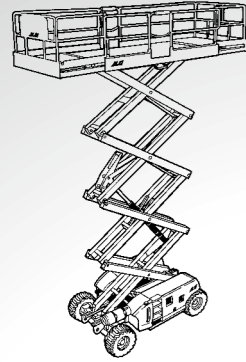

Main Features


- Single hydraulic powered deck extension
- Fold down/drop-down handrails
- Nivelux self-levelling hydraulic jacks
- Four wheel drive
- Steel mesh scissor arm guards

	203-24	210-25	245-25
Liftlux® Series Scissor Lifts			
Platform Height	20.30 m	21.00 m	24.50 m
Platform Capacity	750 kg	1,000 kg	750 kg
Platform Size	2.30 x 4.35 m	2.50 x 5.35 m	2.50 m x 5.35 m
Overall Width	2.40 m	2.50 m	2.50 m
Weight	11,400 kg	15,000 kg	16,300 kg
Diesel Engine	Deutz D2011L03i 31 kW (41 hp)	Deutz D2011L04i 42 kW (56 hp)	Deutz D2011L04i 42 kW (56 hp)
Available Options			
Flashing Amber Beacon	•	•	•
Hydraulic Leveling Jacks	•	•	•
Platform Worklights	•	•	•
Self-Closing Entry Gate	•	•	•
Tyres – 240/55 - 17.5 Foam-Filled	•	•	•
AC Cable to Platform	•	•	•
Bio-Degradable Hydraulic Oil	•	•	•
JLG QuikCharge Gen Set	•	•	•

Certain options or country standards increase weight

AERIAL WORK PLATFORMS SPECIFICATIONS

	3369LE	4069LE
LE Series Large Electric Scissor Lifts		
Platform Height	10.06 m	12.19 m
Platform Capacity – Unrestricted	450 kg	360 kg
Platform Size	1.65 x 2.92 m	1.65 x 2.92 m
Overall Width	1.75 m	1.75 m
Weight	4,600 kg	5,300 kg
Power Source	8 x 6V 370 amp-hr	8 x 6V 370 amp-hr
Available Options		
Flashing Amber Beacon	•	•
Hydraulic Leveling Jacks	•	•
Platform Worklights	•	•
Self-Closing Entry Gate	•	•
Bio-Degradable Hydraulic Oil	•	•
JLG QuikCharge Gen Set	•	•



Main Features

- Double the duty cycles of competitive electric scissor lifts.
- Superior off-slab performance – Full-time automatic traction control system, standard oscillating axle, and all-terrain tyres.
- Powerful options – QuikCharge GenSet and all-wheel drive.
- Fold-down handrails.

• Available - Not available

Deutschland**Tel: +49 (0) 421 693 5010**

JLG Deutschland GmbH
Max-Planck-Straße 21
D-27721 Ritterhude/Ihlpohl (Bei Bremen)

España**Tel: +34 93 772 47 00**

JLG Ibérica, SL
Trapadella, 2
Pol. Ind. Castellbisbal Sur
08755 Castellbisbal (Barcelona)

France**Tel: +33 (0) 553 88 31 70**

JLG France SAS
Zone Industrielle Guillaume mon Amy
F-47400 Tonneins

JLG Industries, Inc.**Tel: +1 717 485 5161****Fax: +1 717 485 5600**

1 JLG Drive
McConnellsburg, PA 17233-9553
USA

Italia**Tel: +39 02 9359 5210**

JLG Industries (Italia) s.r.l.
Via Po.22
20010 Pregnana Milanese -MI-

Russia**Tel: +7 (495) 967 79 14****Fax: +7 (495) 967 76 00**

Oshkosh Rus, LLC
Moscow City Embankment Tower
10 Presnenskaya Naberezhnaya Block C
Moscow 123317

JLG Manufacturing Europe bvba**Tel: +32 (0) 89 77 49 74****Fax: +32 (0) 89 77 74 27**

Oude Bunders 1034
Breitwaterstraat 12a
B-3630 Maasmechelen Belgium

Sverige**Tel: +46 (0) 8 506 59500**

JLG Sverige AB
Enköpingsvägen 150
Box 704, SE-176 77 Järfälla

United Kingdom**Tel: +44 (0) 161 654 1000**

JLG Industries (United Kingdom) Limited
Bentley House, Bentley Avenue
Middleton, Greater Manchester
M24 2GP

JLG Industries, Inc.**Tel: +31 (0) 23 565 5665****Fax: +31 (0) 23 557 2493**

Polaris Avenue 63
2132 JH Hoofddorp
The Netherlands

www.jlgeurope.com

JLG Industries, Inc. is a leading designer and manufacturer of access equipment and complementary services and attachments.

JLG has manufacturing facilities in the United States, France, Romania, China and Belgium. Customers throughout Europe, Scandinavia, Africa and the Middle East benefit from a network of dedicated sales and service operations designed to deliver the highest levels of support.

JLG is an Oshkosh Corporation company.

JLG
reachingout®